


2-in-1 Trainer Thru Axle

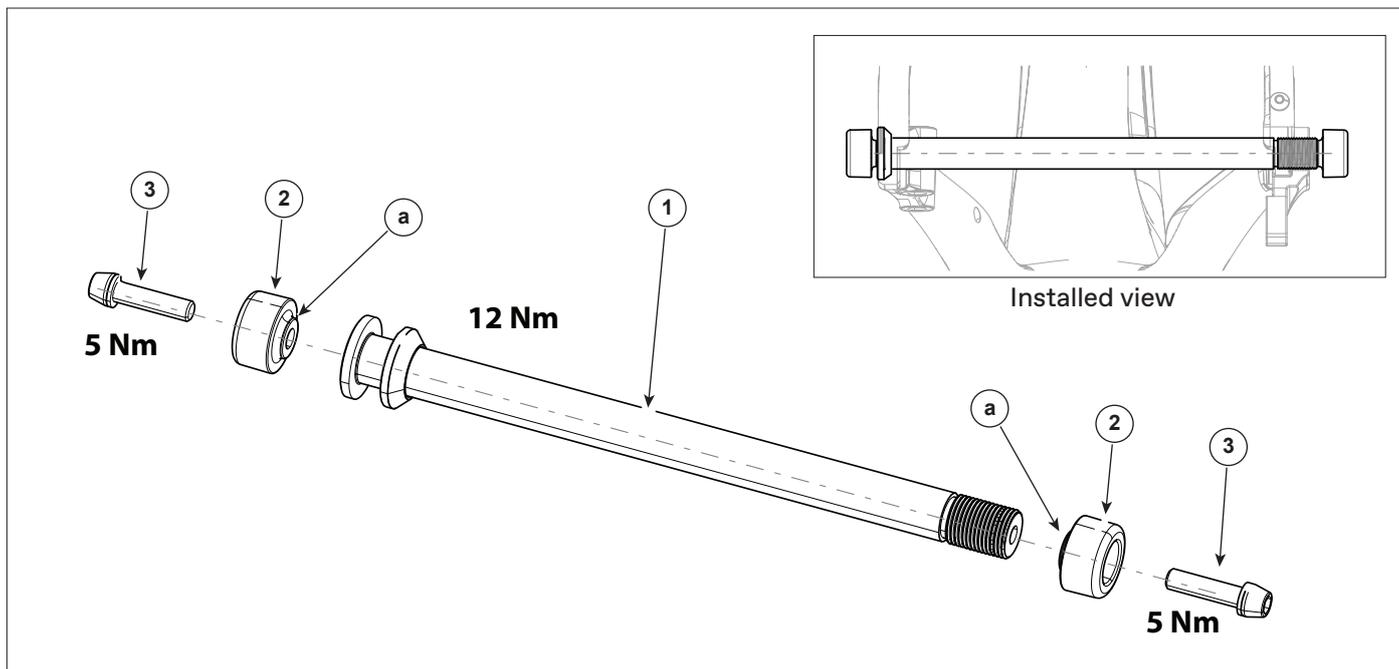

Information

The 2-in-1 Trainer Axle makes switching between a trainer and normal cycling more convenient.

The end caps (2) and bolts (3) can be easily installed and removed without removing the axle from the bike.

Instructions

1. Install the thru axle (1) through the rear wheel without the end caps and tighten to 12 Nm.
2. Install the end caps (2) on both sides of the axle with the small end (a) of facing the axle as shown. Tighten the supplied bolts (3) to 5 Nm.
3. The end caps should be fixed and not move once bolts are installed and torqued. If the end caps are loose or spin something is wrong, remove the bolts and check to make sure the axle is installed properly and no other problems are present.
4. When not using the trainer, remove the end caps and bolts. Check the thru axle tightness. Torque to 12 Nm if necessary.

Axle Kits

Part Number	Description
CP2801U10OS	Syntaxe X-12, Single Lead 12×1.0mm thread, 160mm length
CP2851U10OS	Dual Lead 12×1.0mm thread, 166mm length

NOTICE

Confirm frame/trainer axle compatibility before using a trainer.

Follow the trainer manufacturer mounting instructions.

Mounting your bike in a cycling trainer that is not compatible with your frame or mounting one incorrectly, can result serious frame damage. This kind of damage is not covered by the Cannondale Limited Warranty.

Ask your dealer for help installing the axle and or using cycling trainers.